


Drawing 1

Different Configurations of Streetlight Poles

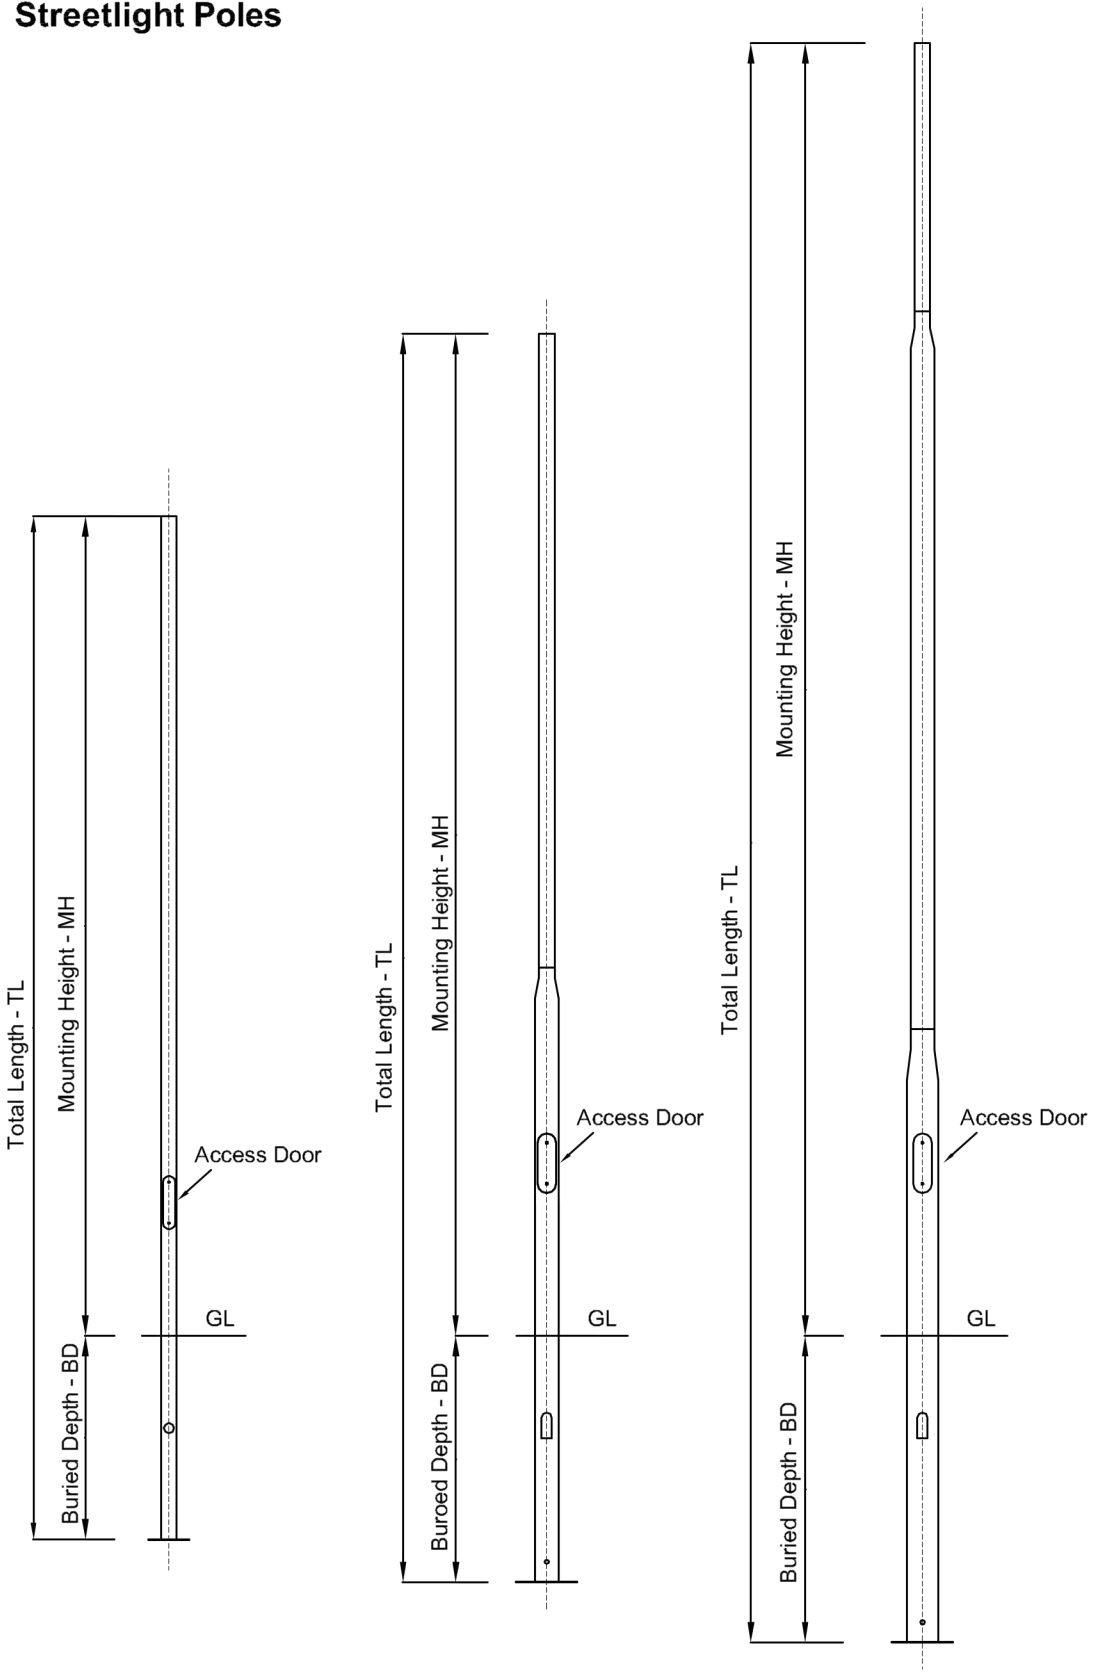

Straight

**Stepped (Parallel Tapered)
1 Reduction**

**Stepped (Parallel Tapered)
2 Reductions**

Detailed dimensions tabled below

Typical Pole Configurations

Straight - 76mm							
TL	MH	BD	Bot dia	Mid dia	Top dia	Base Plate	Gland Plate
2.0	1.5	0.5	76	-	76	FB	No
2.5	2.0	0.5	76	-	76	FB	No
3.0	2.5	0.5	76	-	76	FB	No
3.5	3.0	0.5	76	-	76	FB	No
4.0	3.5	0.5	76	-	76	FB	No
4.5	4.0	0.5	76	-	76	FB	No
5.0	4.5	0.5	76	-	76	FB	No
6.0	5.0	1.0	76	-	76	FB	No
Stepped - 1 Reduction							
TL	MH	BD	Bot dia	Mid dia	Top dia	Base Plate	Gland Plate
3.0	2.5	0.5	114	-	76	FB	Yes
3.5	3.0	0.5	114	-	76	FB	Yes
4.0	3.5	0.5	114	-	76	FB	Yes
4.5	4.0	0.5	114	-	76	FB	Yes
5.0	4.5	0.5	114	-	76	FB	Yes
6.0	5.0	1.0	114	-	76	FB	Yes
7.2	6.0	1.2	114	-	76	BP	Yes
8.2	7.0	1.2	127	-	76	BP	Yes
Stepped - 2 Reductions							
TL	MH	BD	Bot dia	Mid dia	Top dia	Base Plate	Gland Plate
8.2	7.0	1.2	127	89/114	76	BP	Yes
9.3	8.0	1.3	127	89/114	76	BP	Yes
10.5	9.0	1.5	127	114	76	BP	Yes
11.5	10.0	1.5	139	114	76	BP	Yes
13.7	12.0	1.7	152	114	76	BP	Yes
Notes : TL - Total Length of Pole MH - Mounting Height of Pole BD - Buried Depth FB - Flat bar welded to bottom of pole BP - Loose base plate c/w hookbolts & nuts Above configurations are Subject to application of Pole							